



# IP65 Series

## Type 2



Modular outdoor installation LED panel for large-scale signage and scoreboard applications.

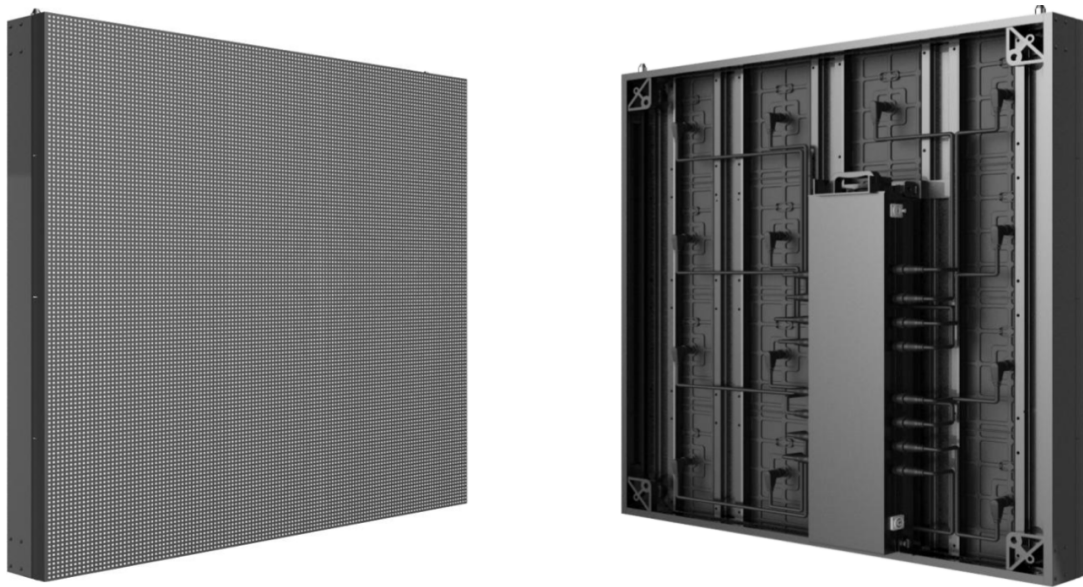


### Key Features

- Slim & Lightweight
- Aluminum Rust-Free Cabinet
- IP65 Waterproof Modules
- Custom Cabinet Sizes
- Fully Sealed Electronics
- High Brightness
- Dual 100% Front & Rear Access
- High Refresh Rate
- CCC, CE, UL, FCC


### Dimensions

1280 x 960 x 116mm (W x H x D)

This series also has custom sizes based on multiples of 320 x 320mm modules

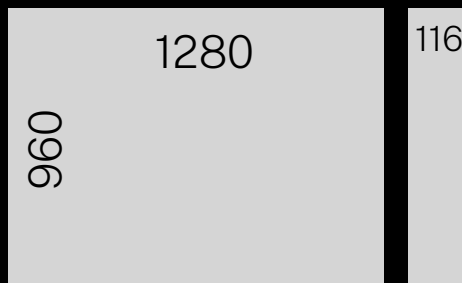

# IP65 Series Type 2



Product Ref.	DLW-IPC2-FX0-P [X= R/F (Rear/Front) , P= Pitch]			
Pixel Pitch (P)	5mm	6mm	8mm	10mm
LED Type	SMD1921	SMD3535	SMD3535	SMD3535
Module Size	320 x 320mm			
Cabinet Material	Aluminium			
Cabinet Size (WxHxD)	960 x 960 x 116mm / 1280 x 960 x 116mm			
Panel Weight/sqm	25kg / 30kg			
Maintenance Access	Front & Rear			
IP-Rating (Front / Rear)	IP67 / IP65			
Brightness	5,500 nits	6,000 nits	6,500 nits	6,500 nits
Refresh Rate	1,920Hz / 3,840Hz			
Gray-Scale	16 bits			
Contrast	3000:1			
Scan Mode	1/8	1/8	1/4	1/2
Viewing Angles (WxH)	160° / 140°			
Power Consumption (Max/Ave)	480 / 190W/sqm	550 / 200W/sqm	530 / 210W/sqm	450 / 180W/sqm
Input Voltage	110-220 VAC			
Operating Temperatures	-20°C-50°C			
Operating Humidity	10% to 90%			