




Flex Series Rental



Curvable modules for creative signage, entertainment and architectural applications.

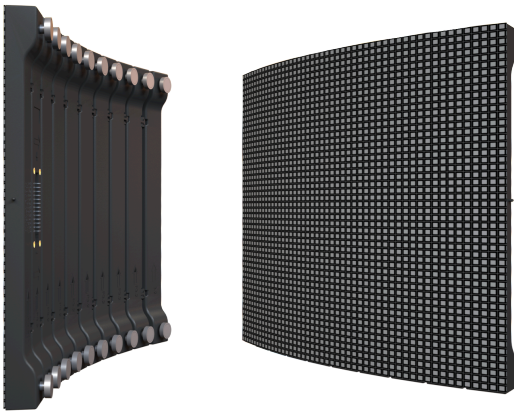

Rental-Ready Indoor (RDI)

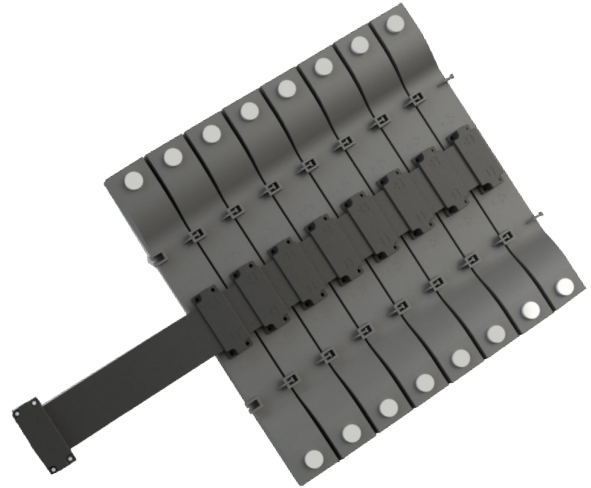

Rental-Ready Outdoor (RDO)

Key Features


- Scalable Design
- Customized Cabinet Size
- 100% Front or Rear Access
- Various Brightness Options
- Various LED Options
- High Refresh Rate
- CE

Dimensions

Rental-Ready Outdoor (WxH)

320 x 320mm



304.8 x 304.8mm




Rental-Ready Indoor (WxH)

288 x 144mm

360 x 120mm

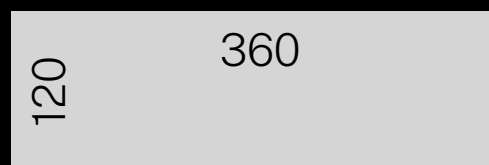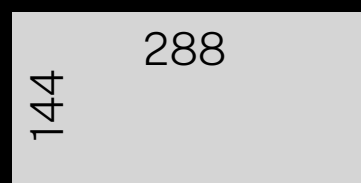

Flex Series



Product Ref.	DLW-RDI-P					[P= Pitch]	DLW-RDO-P				[P= Pitch]
Pixel Pitch (P)	3mm	4mm	6mm	4mm	5mm		3.81mm	6.67mm	8mm	10mm	
LED Type	SMD2020	SMD2020	SMD2020	SMD2020	SMD3528		SMD1921	SMD1921	SMD3535	SMD3535	
Module Size	288 x 144mm			360 x 120 x 36mm			304.8 x 304.8mm	320 x 320mm			
Module Resolution (W x H)	96 x 48 dots	72 x 36 dots	48 x 24 dots	80 x 40 dots	64 x 32 dots		80 x 80 pixels	48 x 48 pixels	40 x 40 pixels	32 x 32 pixels	
Colour Depth	16-bits						12-16 bits				
Colors	281 Trillion						4,096-65,536				
Max. Brightness	1,000 nits			1,500 nits			5,000 nits	6,000 nits	6,000 nits	6,000 nits	
Viewing Angles (WxH)	140° x 140°						140° x 140°				
Min. Viewing Distance	≥3m	≥4m	≥6m	≥4m	≥5m		≥3.8m	≥7m	≥8m	≥10m	
Refresh Rate	2,880Hz or 3,840Hz						≥3,840 Hz				
Input Voltage	100-240V / 50-60Hz						100-240 V / 50-60 Hz				
Power Consumption (Max)	480W/sqm	480W/sqm	480W/sqm	650W/sqm	440W/sqm		1032W/sqm	690W/sqm	720W/sqm	890W/sqm	
Power Consumption (Average)	160W/sqm	160W/sqm	160W/sqm	217 W/sqm	147W/sqm		310W/sqm	240W/sqm	216W/sqm	297W/sqm	
Life-Span	100,000Hrs						100,000Hrs				
IP-Rating (Front / Rear)	IP41 / IP41						IP68 / IP68				
Operating Temperatures	0°C to +40°C			-20°C to +65°			-20 °C/+50°C				
Operating Humidity	10 to 90% RH						10%-100%				
Control System	Colorlight / Novastar-Synchronous / Asynchronous						Colorlight / Novastar-Synchronous / Asynchronous				