


# Touring Series Indoor



Premium touring grade LED panel for large-scale staging and creative applications.





## Key Features

- Standard & Long Cabinet Versions
- Highly Modular
- Memory-on-Module Function
- Curvable Option  $-5^{\circ}$  to  $+10^{\circ}$
- Ultra-Fast Assembling/Dismantling
- Fast Swap Electronics
- Front or Rear Access Modules
- High Refresh Rate
- CE, TUV, EMC, RoHS


## Dimensions

2 cabinet sizes available:

500 x 500 x 85mm  
500 x 1000 x 85mm  
(W x H x D)

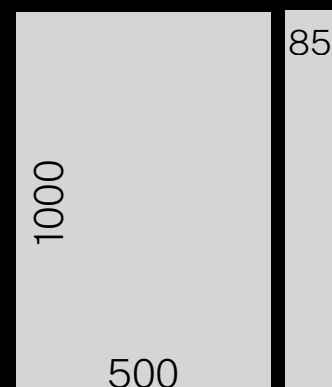

# Touring Series Indoor



Product Ref.	DLW-TRG-RXI-P [X= R/F (Rear/Front) , P= Pitch]		
Pixel Pitch (P)	2.6mm	2.97mm	3.91mm
LED Type	SMD2121	SMD2121	SMD2121
Module Size	250 x 250 x 16mm		
Module Resolution (WxH)	96 x 96 dots	84 x 84 dots	64 x 64 dots
Dots Per Modules	9,216 dots	7,056 dots	4,096 dots
Scan Mode	1/24	1/21	1/16
Cabinet Size (WxHxD)	500 x 500 x 85mm	500 x 500 x 85mm / 500 x 1000 x 85mm	
Cabinet Resolution (WxH)	192 x 192	168 x 168	128 x 128 / 128 x 256
Module Quantity (WxH)	2 x 2 pcs	2 x 2 pcs	2 x 2 / 2 x 4pcs
Pixel Density/Cabinet	147,456 dots	147,456 dots	65,536 dots
Cabinet Material	Die-cast Aluminum		
Cabinet Weight	7.3kg	7.3kg	7kg / 12kg
Max. Brightness	1,100 nits		
Viewing Angles (WxH)	160° x 140°		
Min. Viewing Distance	≥2.6m	≥3m	≥4m
Gray-Scale	14-bits		
Colors	281 Trillion		
Refresh Rate	3,840Hz		
Input Voltage	100-240V / 50-60Hz		
Power Consumption (Max/Ave)	500 / 180W/sqm		
MTBF	>10,000Hrs		
Life-Span	≥100,000Hrs		
IP-Rating (Front / Rear)	IP40 / IP21		
Operating Temperatures	- 20°C to +45°C		
Operating Humidity	0% to 90% RH		
Control System	Colorlight/Novastar -Synchronous		