


Portable Series Type 1



Multi-purpose and very high-resolution indoor LED panels for mobile and fixed applications.




Key Features


- Super Compact Cabinet
- Lightweight
- Fast Assembling
- Easy Maintenance
- Front or Rear Access
- High Refresh Rate
- CE

Dimensions

480 x 480 x 86mm
(W x H x D)

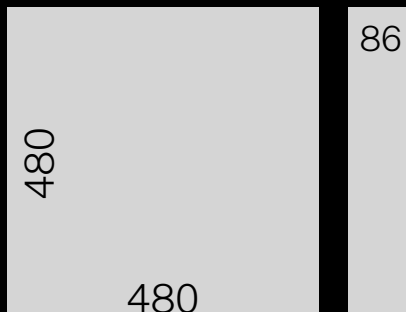

Portable Series Type 1



Product Ref.	DLW-PRT1-FRI-P		[P= Pitch]
Pixel Pitch (P)	1.667mm		1.875mm
LED Type	SMD1212		SMD1515
Module Size	240 × 240mm		
Module Resolution (WxH)	144 × 144 dots		128 × 128 dots
Dots Per Modules	20,736 dots		16,384 dots
Scan Mode	1/24		1/32
Cabinet Size (WxHxD)	480 x 480 x 86mm		
Cabinet Resolution (WxH)	288 × 288 dots		256 × 256 dots
Module Quantity (WxH)	2 x 2 = 4pcs		
Pixel Density/sqm	82,944 dots		65,536 dots
Cabinet Material	Die-cast Aluminum		
Cabinet Weight	6kg		
Max. Brightness	900 nits		
Viewing Angles (WxH)	160° x 140°		
Min. Viewing Distance	≥1.7m		≥1.9m
Contrast Ratio	8000:1		
Gray-Scale	16-bits		
Colors	281 Trillion		
Refresh Rate	2,880Hz or 3,840Hz		
Input Voltage	100-240V / 50-60Hz		
Power Consumption (Max/Ave)	600 / 200W/sqm		
MTBF	>10,000Hrs		
Life-Span	≥100,000Hrs		
IP-Rating (Front / Rear)	IP45 / IP45		
Operating Temperatures	- 20°C to +60°C		
Operating Humidity	10% to 60% RH		
Control System	Colorlight/Novastar -Synchronous/Asynchronous		