





Architectural Series Indoor



Ultimate installation LED panel for world-class indoor video-wall integration.

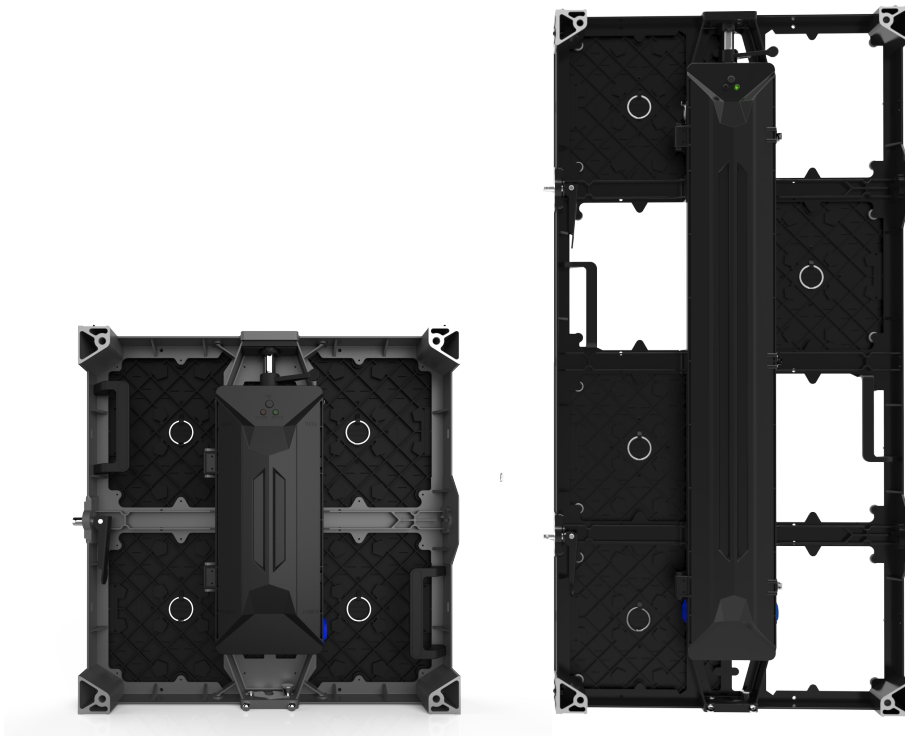



Key Features

- Thin & Super Lightweight
- Stacking / Wall Mount
- Easy Maintenance
- CE-TUV, RoHS, EMC
- Seamless Corner Cabinets
- High Refresh Rate
- 100% Front or Rear Access
- Two Cabinet Sizes


Dimensions

2 cabinet sizes available:

500 x 500 x 90mm
500 x 1000 x 90mm
(W x H x D)

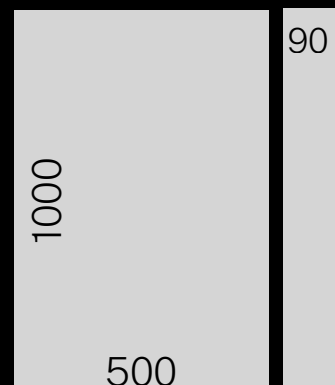

Architectural Series Indoor



Product Ref.	DLW-ARC-FXI-P						[X= R/F (Rear/Front)]
Pixel Pitch (P)	2.6mm	2.8mm	3.1mm	3.9mm	4.8mm	5.9mm	
LED Type	SMD2020						
Module Size	250 x 250mm						
Module Resolution (WxH)	96 x 96 dots	89 x 89 dots	81 x 81 dots	64 x 64 dots	52 x 52 dots	42 x 42 dots	
Dots Per Modules	9,216 dots	7,921 dots	6,561 dots	4,096 dots	2,704 dots	1,764 dots	
Scan Mode	1/16	1/30	1/16	1/16	1/13	1/7	
Cabinet Size (WxHxD)	500 x 500 x 83mm / 500 x 1000 x 83mm						
Cabinet Resolution (WxH)	192 x 192 192 x 384	178 x 178 178 x 356	162 x 162 162 x 324	128 x 128 128 x 256	104 x 104 104 x 208	84 x 84 84 x 168	
Module Quantity (WxH)	2 x 2 / 2 x 4 pcs						
Pixel Density/Cabinet	147,456 dots	126,736 dots	104,976 dots	65,536 dots	43,264 dots	28,224 dots	
Cabinet Material	Aluminum Die-cast						
Cabinet Weight	7.5kg / 13.5kg						
Max. Brightness	1,000 nits						
Viewing Angles (WxH)	160° x 140°						
Min. Viewing Distance	≥2.6m	≥2.8m	≥3m	≥4m	≥5m	≥6m	
Gray-Scale	16-bits						
Colors	281 Trillion						
Refresh Rate	3,840Hz						
Input Voltage	100-240V / 50-60Hz						
Power Consumption (Max/Ave)	360 / 180W/sqm	400 / 200W/sqm	392 / 220W/sqm	456 / 240W/sqm	412 / 230W/sqm	496 / 270W/sqm	
MTBF	>10,000Hrs						
Life-Span	≥100,000Hrs						
IP-Rating (Front / Rear)	IP40 / IP20						
Operating Temperatures	-20°C to +50°C						
Operating Humidity	0% to 60% RH						
Control System	Colorlight/Novastar-Synchronous/Asynchronous						