


# Portable Series

## Type 4




Multi-purpose and high-resolution outdoor LED panel for mobile or fixed installations.




### Key Features

- High-Precision Aluminium Die-Cast Cabinet
- Super Lightweight
- Seamless & Bezel-Free
- Rear Maintenance Access

### Dimensions (Pitch dependant)

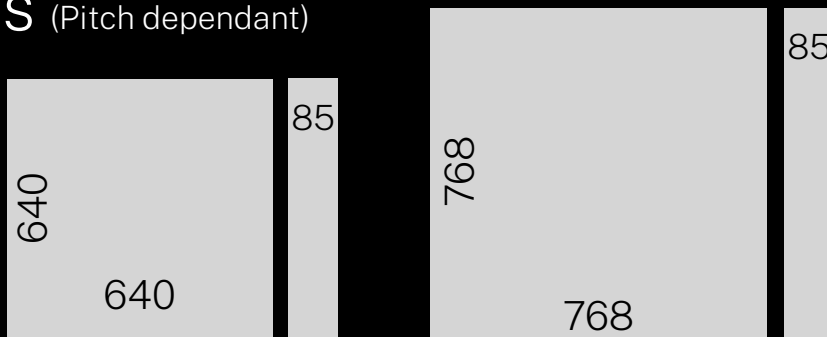

# Portable Series Type 4



Product Ref.	DLW-PRT4-RFO-P			[P= Pitch]
Pixel Pitch (P)	3.076mm	3.33mm	4mm	
LED Type	SMD1415	SMD1921	SMD1921/2525/2727	
Module Size	320 × 160mm	320 × 160mm	256 × 128mm	
Module Resolution (WxH)	104 × 52 dots	96 × 48 dots	64 × 32 dots	
Dots Per Modules	5,408 dots	4,608 dots	2,048 dots	
Scan Mode	1/13	1/12	1/8	
Cabinet Size (WxHxD)	640 × 640 × 85mm	640 × 640 × 85mm	768 × 768 × 85mm	
Cabinet Resolution (WxH)	208 × 208 dots	192 × 192 dots	192 × 192 dots	
Module Quantity (WxH)	2 × 4 = 8pcs	2 × 4 = 8pcs	3 × 6 = 18pcs	
Pixel Density/Cabinet	43,264 dots	36,864 dots	36,864 dots	
Cabinet Material	Die-cast Aluminum			
Cabinet Weight	20kg	18kg	20kg	
Max. Brightness	6,000 nits			
Viewing Angles (WxH)	160° × 140°			
Min. Viewing Distance	≥3m	≥3.5m	≥4m	
Gray-Scale	16-bits			
Colors	281 Trillion			
Refresh Rate	1,920Hz or 3,840Hz			
Input Voltage	100-240V / 50-60Hz			
Power Consumption (Max/Ave)	750 / 280W/sqm	784 / 262W/sqm	600 / 200W/sqm	
MTBF	>10,000Hrs			
Life-Span	≥100,000Hrs			
IP-Rating (Front / Rear)	IP65 / IP54			
Operating Temperatures	40°C to +70°C			
Operating Humidity	10% to 90% RH			
Control System	Colorlight/Novastar-Synchronous/Asynchronous			
Source Compatibility (with video processor)	DVI, HDMI, VGA, SDI, DP			