


Touring Series Outdoor



Premium touring grade, high-brightness LED panel for large-scale staging and flown applications.





Key Features

- Two Cabinet Sizes Available
- Highly Modular
- High Brightness
- Memory-on-Module Function
- Curvable Option -5° to $+10^{\circ}$
- Ultra-Fast Assembling/Dismantling
- Fast Swap Electronics
- Rear Access
- High Refresh Rate
- CE, TUV, EMC


Dimensions

2 cabinet sizes available:

500 x 500 x 85mm
500 x 1000 x 85mm
(W x H x D)

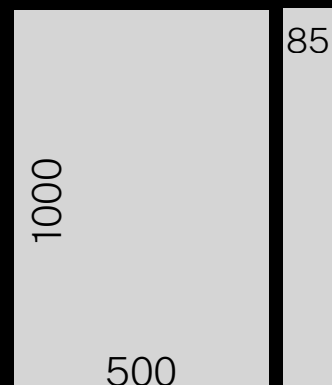

Touring Series Outdoor



Product Ref.	DLW-TRG-RRO-P		[P= Pitch]
Pixel Pitch (P)	3.91mm		4.81mm
LED Type	SMD1921		SMD1921
Module Size	250 x 250 x 16mm		
Module Resolution (WxH)	64 x 64 dots		52 x 52 dots
Dots Per Modules	4,096 dots		2,704 dots
Scan Mode	1/16		1/13
Cabinet Size (WxHxD)	500 x 500 x 85mm / 500 x 1000 x 85mm		
Cabinet Resolution (WxH)	128 x 128 / 128 x 256		104 x 104 / 104 x 208
Module Quantity (WxH)	2 x 2 / 2 x 4pcs		
Pixel Density/Cabinet	65,536 dots		43,264 dots
Cabinet Material	Die-cast Aluminum		
Cabinet Weight	7kg / 12kg		
Max. Brightness	5,000 nits		
Viewing Angles (WxH)	160° x 140°		
Min. Viewing Distance	≥4m		≥5m
Gray-Scale	14-bits		
Colors	281 Trillion		
Refresh Rate	3,840Hz		
Input Voltage	100-240V / 50-60Hz		
Power Consumption (Max/Ave)	1040 / 340W/sqm		
MTBF	>10,000Hrs		
Life-Span	≥100,000Hrs		
IP-Rating (Front / Rear)	IP65 / IP54		
Operating Temperatures	- 20°C to +60°C		
Operating Humidity	0% to 90% RH		
Control System	Colorlight/Novastar-Synchronous		