



Window Series Outdoor



High-transparency installation
LED panel for creative and
commercial applications.

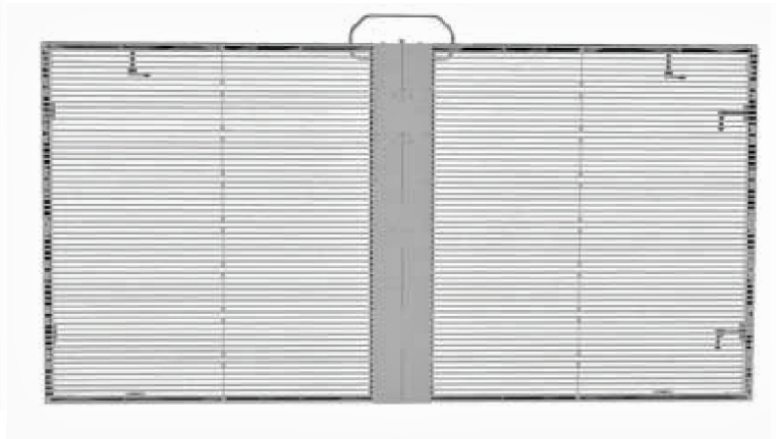



Key Features

- Custom-Size Cabinet Options
- 100% Front or Rear Access
- Silver/Black Finish
- Framed/Open Versions
- Custom Brightness Option
- Various LED Options
- High Refresh Rate
- CE


Dimensions

1000 x 500 x 74mm
1000 x 1000 x 74mm (Custom only)

(W x H x D)

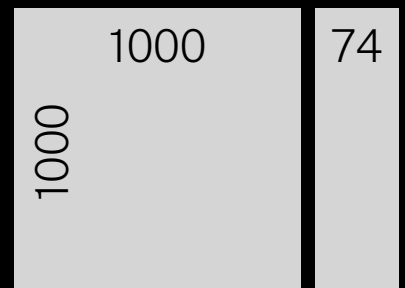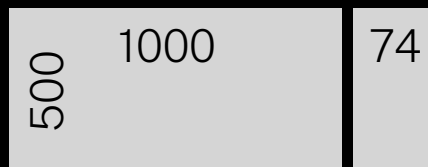

Window Series Outdoor



Product Ref.	DLW-WIN-FXO-P-S-Y-C			[X= R/F (Rear/Front) Y= F/O (Framed/Open) C= S/B (Silver/Black)
Pixel Pitch (P)	3.91-7.81mm	7.81-7.81mm	5.2-10.4mm	

LED Type	SMD1921		
Module Size	500 x 125mm		
Module Resolution (WxH)	128 x 16 dots	64 x 16 dots	96 x 12 dots
Dots Per Modules	2,048 dots	1,024 dots	1,152 dots
Scan Mode	1/16	1/7	1/10
Cabinet Size (WxH)	1000 x 500 x 74mm or 1000x x 1000 x 74mm		
Cabinet Resolution (WxH)	256 x 64 / 256 x 128 dots	128 x 64 / 128 x 128 dots	192 x 64 / 192 x 128 dots
Module Quantity (WxH)	2 x 4 = 8pcs / 2 x 8 = 16pcs		
Pixel Density/Cabinet	16,384 / 32,768 dots	8,192 / 16,384 dots	12,288 / 24,576 dots
Cabinet Material	Aluminium		
Cabinet Weight	4kg / 7kg		
Max. Brightness	5,500 nits		
Viewing Angles (WxH)	120° x 120°		
Min. Viewing Distance	≥4m	≥8m	≥8m
Gray-Scale	16-bits		
Colors	281 Trillion		
Refresh Rate	1,920Hz-3,840Hz		
Input Voltage	100-240V / 50-60Hz		
Power Consumption (Max/Ave)	800 / 240W/sqm		
MTBF	>10,000Hrs		
Life-Span	≥100,000Hrs		
IP-Rating (Front / Rear)	IP65 / IP54		
Operating Temperatures	- 10°C to +45°C		
Operating Humidity	10% to 90% RH		
Control System	Colorlight/Novastar -Synchronous/Asynchronous		