


# Broadcast Series Type 2



Super high-resolution portable LED panel for TV/Media studios and conference/presentation applications.




## Key Features


- 4k Performance
- Ultra Slim & Ultra Light
- 16:9 HD Cabinet Format
- Ultra-High Resolution
- Optional Redundancy
- 100% Front Access
- SMD, COB or GOB
- High Refresh Rate
- CE, RoHS, EMC

## Dimensions

600 x 337.5 x 65mm  
(W x H x D)

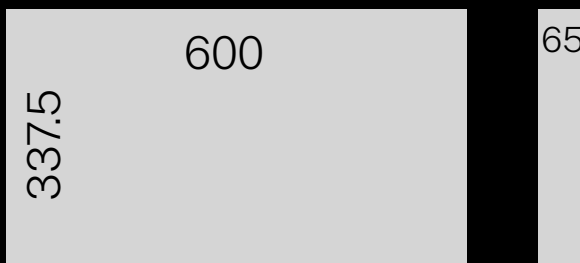

# Broadcast Series Type 2



Product Ref.	DLW-BRO2-FFI-P					[P= Pitch]
Pixel Pitch (P)	0.93mm	1.25mm	1.5625mm	1.875mm	2.5mm	
LED Type	COB	SMD1010	SMD1212	SMD1515	SMD2121	
Module Size	150 x 168.75mm					
Module Resolution (WxH)	161 x 181 dots	120 x 135 dots	96 x 108 dots	80 x 90 dots	75 x 84 dots	
Dots Per Modules	29,141 dots	16,200 dots	10,368 dots	7,200 dots	6,300 dots	
Scan Mode	1/60	1/58	1/64	1/57	1/24	
Cabinet Size (WxHxD)	600 x 337.5 x 65mm					
Cabinet Resolution (WxH)	644 x 362 dots	480 x 270 dots	384 x 216 dots	320 x 180 dots	300 x 168 dots	
Module Quantity (WxH)	4 x 2 = 8pcs					
Pixel Density/Cabinet	233,128 dots	129,600 dots	82,944 dots	57,600 dots	50,400 dots	
Cabinet Material	Die-cast Aluminium					
Cabinet Weight	7.3kg					
Max. Brightness	900 nits					
Viewing Angles (WxH)	160° x 140°					
Min. Viewing Distance	≥1m	≥1.3m	≥1.6m	≥1.9m	≥2.5m	
Gray-Scale	16-bits					
Colors	281 Trillion					
Refresh Rate	3,840Hz					
Contrast Ratio	8000:1					
Input Voltage	100-240V / 50-60Hz					
Power Consumption (Max/Ave)	620 / 250W/sqm					
MTBF	> 10,000Hrs					
Life-Span	≥ 100,000Hrs					
IP-Rating (Front / Rear)	IP30 / IP30					
Operating Temperatures	-20°C to +60°C					
Operating Humidity	10% to 60% RH					
Control System	Colornight/Novastar - Synchronous/Asynchronous					