



Architectural Series Outdoor



Ultimate installation LED panel for world-class outdoor video-wall integration.

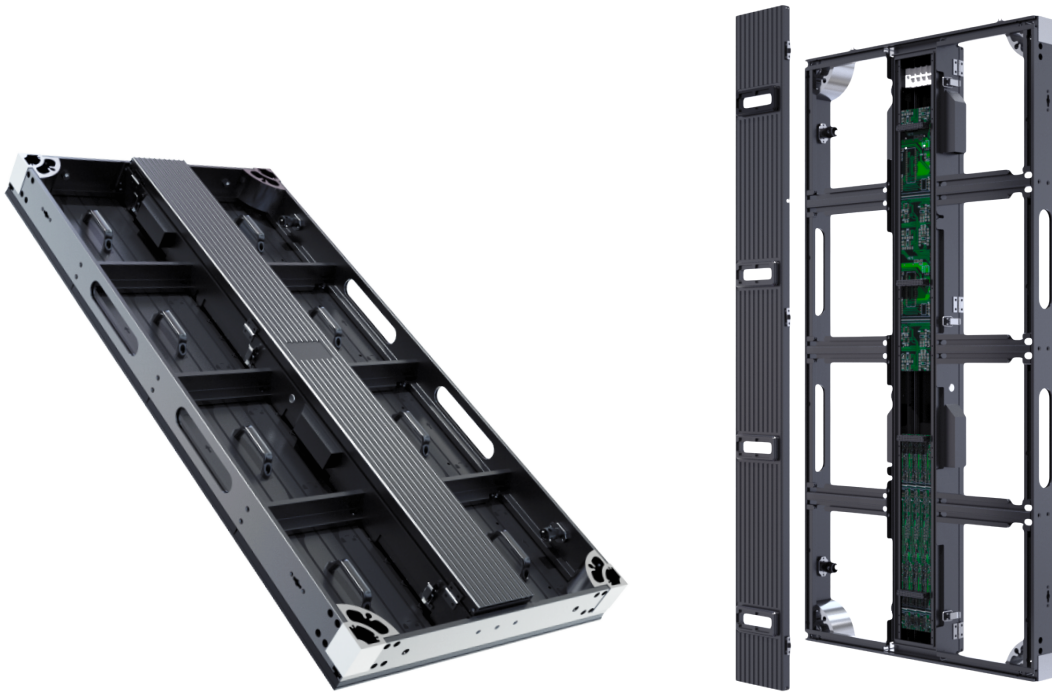


Key Features

- Thin & Super Light
- Stacking / Wall Mount
- Easy Maintenance
- High Refresh Rate
- Calibration Memory Function (optional)
- Various Cabinet Sizes
- Secured 100% Front & Rear Access
- CE-TUV, RoHS, EMC
- IP65
- Rust-Proof Aluminium Cabinets


Dimensions

Various cabinet sizes available

- 500 x 500 x 90mm
 - 500 x 750 x 90mm
 - 500 x 1000 x 90mm
- (W x H x D)

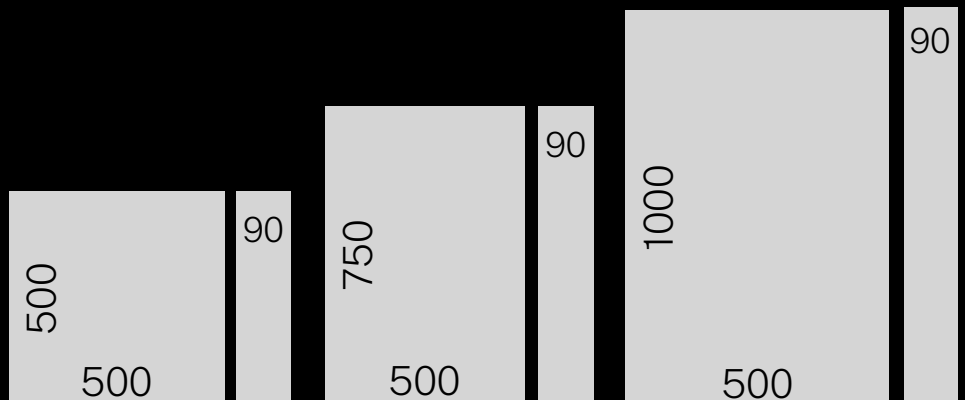

Architectural Series Outdoor



Product Ref.	DLW-ARC-FXO-P		
	[X= R/F (Rear/Front)]		
Pixel Pitch (P)	3.91mm	4.81mm	5.95mm
LED Type	SMD1921	SMD1921	SMD2727
Module Size	500 x 250mm		
Module Resolution (WxH)	128 x 64 dots	104 x 52 dots	84 x 42 dots
Dots Per Modules	8,192 dots	5,408 dots	3,528 dots
Scan Mode	1/16	1/13	1/7
Cabinet Size (WxHxD)	500 x 500 x 90mm / 500 x 750 x 90mm / 500 x 1000 x 90mm		
Cabinet Resolution (WxH)	128 x 128 / 128 x 192 / 128 x 256 dots	104 x 104 / 104 x 156 / 104 x 208 dots	84 x 84 / 84 x 126 / 84 x 168 dots
Module Quantity (WxH)	1 x 2 / 1 x 3 / 1 x 4 pcs	1 x 2 / 1 x 3 / 1 x 4 pcs	1 x 2 / 1 x 3 / 1 x 4 pcs
Pixel Density per sqm	65,536 dots	43,264 dots	28,224 dots
Cabinet Material	Die-cast Aluminium		
Cabinet Weight	8 / 12 / 16kg		
Max. Brightness	4,500-5,000 nits	4,500-5,000 nits	5,000-5,500 nits
Viewing Angles (WxH)	160° x 130°		
Min. Viewing Distance	≥4m	≥5m	≥6m
Gray-Scale	16-bits		
Colors	281 Trillion		
Refresh Rate	1,920Hz / 3,840Hz		
Input Voltage	100-240V / 50Hz		
Power Consumption (Max/Ave)	700 / 350W/sqm	680 / 340W/sqm	550 / 184W/sqm
MTBF	≥100,000Hrs		
Life-Span	≥100,000Hrs		
IP-Rating (Front / Rear)	IP65 / IP65		
Operating Temperatures	- 30°C to +50°C		
Operating Humidity	10% to 90% RH		
Control System	Colorlight/Novastar - Synchronous/Asynchronous		